



No liability can be accepted for the data below which is given for guidance only.

## Bathroom Zone Chart

IEE wiring regulations, BS 7671:2001, Section 601 gives requirements for areas containing a bath or shower. This document should be consulted before installation of appliances.

Areas of the bathroom are split into zones. As a guide only, the requirements for luminaires in each zone may be summarised as follows.

Particular care should be taken with wash basins, guidance for these are also contained within BS 7671.

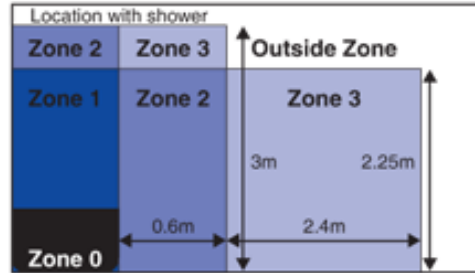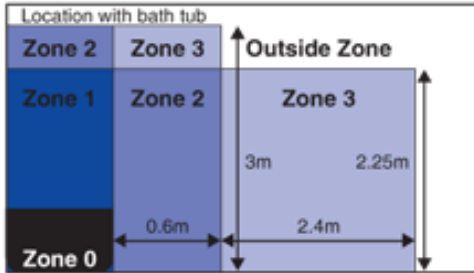

	Protection	IP Rating
<b>Zone 0</b>	SELV < 12V rms a.c. Transformer must be outside zones 0-2	IPX7
<b>Zone 1</b>	SELV < 12V rms a.c. Transformer must be outside zones 0-2	IPX4, or if water jets are likely to be used for cleaning purposes in communal baths or showers, IPX5
<b>Zone 2</b>	As Zone 1	As Zone 1
<b>Zone 3</b>	No limitation on fixed equipment	IPX5 if likely to be subject to water jets for cleaning